

# DPC NEO

Piston packing set for split pistons DPC-NEO

**HANSA FLEX**

## Properties

**Operating pressure** up to 700 bar

**Sliding speed max.** 0,5 m/s

**Temp. min.** -30 °C

**Temp. max.** 110 °C

**Media** Mineral oils  
Water emulsions


**Installation** on multi-part pistons

**Material** (1) Seal: fabric-reinforced NBR  
(3) Back ring: acetal resin

**Application** Hydraulics



Toleranz / Tolerance					
D	d	L	G	M	P
H11	+0,10 0	+0,25 0	+0,10 0	± 0,05	± 0,15

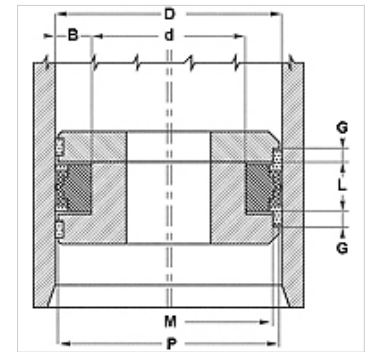

## Description

Extremely good sealing effect at low pressure.

Low friction.

High pressure.

Simple solution.

## Item

Identification	D (mm)	d (mm)	L (mm)	P (mm)
DPC 85 65-NEO	85	65	22,4	83,3
DPC 90 70-NEO	90	70	22,4	88,3
DPC 100 80-NEO	100	80	25,4	98,3
DPC 120 100-NEO	120	100	25,4	118,3