

DPC NEO

Piston packing set for split pistons DPC-NEO

HANSA FLEX

Properties

Operating pressure up to 700 bar

Sliding speed max. 0,5 m/s

Temp. min. -30 °C

Temp. max. 110 °C

Media Mineral oils
Water emulsions


Installation on multi-part pistons

Material (1) Seal: fabric-reinforced NBR
(3) Back ring: acetal resin

Application Hydraulics



Toleranz / Tolerance					
D	d	L	G	M	P
H11	+0,10 0	+0,25 0	+0,10 0	± 0,05	± 0,15

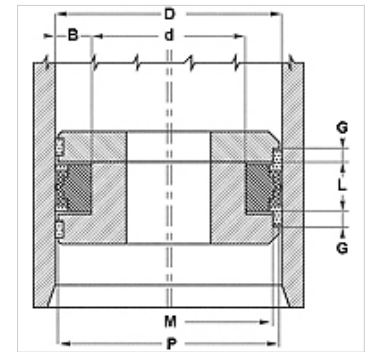

Description

Extremely good sealing effect at low pressure.

Low friction.

High pressure.

Simple solution.

Item

Identification	D (mm)	d (mm)	L (mm)	P (mm)
DPC 85 65-NEO	85	65	22,4	83,3
DPC 90 70-NEO	90	70	22,4	88,3
DPC 100 80-NEO	100	80	25,4	98,3
DPC 120 100-NEO	120	100	25,4	118,3