DPC NEO


Piston packing set for split pistons DPC-NEO

Properties

Operating pressure	up to 700 bar
Sliding speed max.	0,5 m/s
Temp. min.	-30 °C
Temp. max.	110 °C
Media	Mineral oils Water emulsions
Installation	on multi-part pistons
Material	(1) Seal: fabric-reinforced NBR (3) Back ring: acetal resin
Application	Hydraulics



Toleranz / Tolerance					
D	d	L	G	M	P
H11	+0,10 0	+0,25 0	+0,10 0	± 0,05	± 0,15

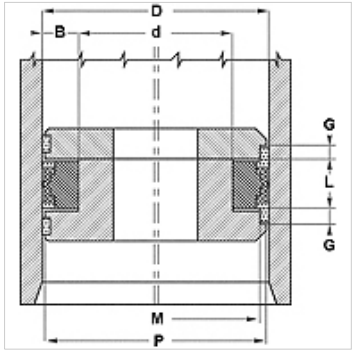

Description

Extremely good sealing effect at low pressure.
Low friction.
High pressure.
Simple solution.

Item

Identification	D (mm)	d (mm)	L (mm)	P (mm)
DPC 85 65-NEO	85	65	22,4	83,3
DPC 90 70-NEO	90	70	22,4	88,3
DPC 100 80-NEO	100	80	25,4	98,3
DPC 120 100-NEO	120	100	25,4	118,3

Despite careful checking, we cannot guarantee the accuracy of all information included on this site, and we accept no liability.