

DSR FPM
Wiper DSR-FPM

Properties

Design	Wipers
Sliding speed max.	0,5 m/s
Temp. min.	-30 °C
Temp. max.	110 °C
Media	Mineral oils Water emulsions
Installation	bend the wiper into a kidney shape and press into the locating groove
Material	FPM
Application	Hydraulics



Toleranz / Tolerance			
d	D	C	L
h11	H11	H11	+0,20 0

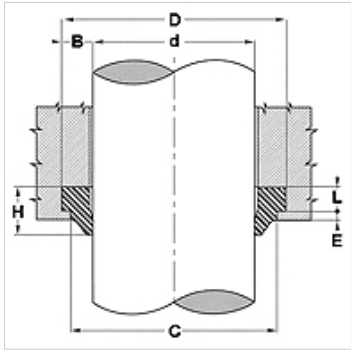

Description

Easy assembly.

Item

Identification	d (mm)	D (mm)	L (mm)	C (mm)	E (mm)
DSR 100 FPM	100	108	4,0	106	1,0
DSR 18 FPM	18	26	4,0	24	1,0

Despite careful checking, we cannot guarantee the accuracy of all information included on this site, and we accept no liability.