



## Properties

<b>Design</b>	Rod lip seal
<b>Operating pressure</b>	up to 400 bar
<b>Sliding speed max.</b>	0,5 m/s
<b>Design</b>	Inches
<b>Temp. min.</b>	-30 °C
<b>Temp. max.</b>	80 °C
<b>Media</b>	Mineral oils
<b>Installation</b>	in closed grooves in open grooves
<b>Material</b>	PUR
<b>Application</b>	Hydraulics



Spaltmaß / Clearance		
Druck bar	e (mm) EU - EU-I	
	d < 60 mm	d > 60 mm
50	< 0,40	< 0,50
100	< 0,30	< 0,40
200	< 0,20	< 0,30
300	< 0,15	< 0,20
400	< 0,10	< 0,15

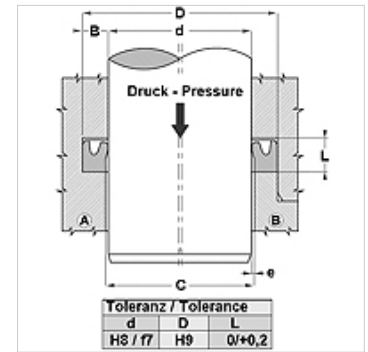

## Description

Low-friction seal.  
High abrasion resistance.  
Simple solution.

## Ordering information

We are able to produce EU seals with diameters of 20 to 510 mm with short lead times.

Item			
Identification	D (mm)	d (mm)	L (mm)
EU-I 100 125	31,75	25,40	7,0
EU-I 125 162	41,22	31,75	8,7
EU-I 150 187	47,62	38,10	8,7
EU-I 200 250	63,50	50,80	10,5
EU-I 225 262	66,67	57,15	10,5
EU-I 225 275	69,85	57,15	10,5
EU-I 237 287	73,03	60,33	10,3
EU-I 250 300	76,20	63,50	10,5
EU-I 275 325	82,55	69,85	10,5
EU-I 300 350	88,90	76,20	10,5
EU-I 325 375	95,25	82,55	10,5
EU-I 350 400	101,60	88,90	10,5
EU-I 400 462	117,47	101,60	10,5