


Properties

Design	Piston packing set
Operating pressure	up to 400 bar
Sliding speed max.	0,5 m/s
Temp. min.	-30 °C
Temp. max.	80 °C
Media	Mineral oils
Installation	on one-piece pistons A on multi-part pistons B
Material	(1) Dynamic seal: PUR (2) Static seal: NBR (3) Guide ring: acetal resin
Application	Hydraulics



Toleranz / Tolerance						
D	d	L	G	M	P	
H11	+0,12 0	+0,20 0	+0,10 0	± 0,05	± 0,15	

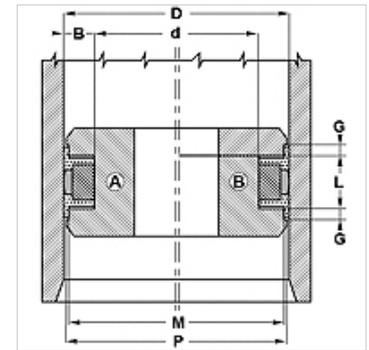

Description

Extremely good sealing effect at low pressure.
 Low spatial requirement.
 Easy assembly.
 Simple solution.
 High abrasion resistance.

Item	D	d	L	G	M	P
Identification	(mm)	(mm)	(mm)	(mm)	(mm)	(mm)
EUD 60 48	60	48	20,5	4,20	56	59,4
EUD 63 51	63	51	20,5	4,20	59	62,4
EUD 70 58	70	58	20,5	4,20	66	69,4
EUD 80 66	80	66	22,5	5,20	76	79,4
EUD 100 86	100	86	22,5	5,20	96	99,4
EUD 110 96	110	96	22,5	5,20	106	109,4
EUD 125 108	125	108	26,5	7,20	121	124,4