



### Properties

Design	Wipers
Sliding speed max.	0,5 m/s
Temp. min.	-20 °C
Temp. max.	200 °C
Media	Mineral oils Water emulsions
Installation	is pressed into an open groove
Material	(1) Sleeve: Steel Wiper: FPM
Application	Hydraulics



Toleranz / Tolerance			
d	D	L	
h11	H8	+0,20 0	

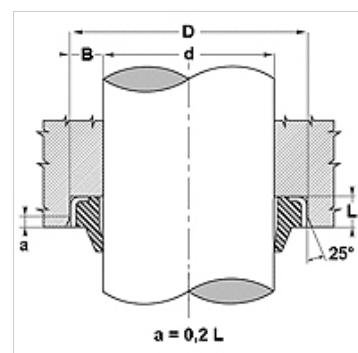

### Description

Low spatial requirement.

No penetration of dirt via the outer metal ring.

Simple solution.

### Ordering information

For special operating conditions (fluid, temperature, pressure ...) please contact us.

#### Item

Identification	d (mm)	D (mm)	L (mm)	H (mm)
<b>GA 16 22-3 FPM</b>	16	22	3,0	4
<b>GA 25 35-7 FPM</b>	25	35	7,0	10
<b>GA 30 40-7 FPM</b>	30	40	7,0	10
<b>GA 32 45-4 FPM</b>	32	45	4,0	8
<b>GA 45 55-7 FPM</b>	45	55	7,0	10
<b>GA 45 60-7 FPM</b>	45	60	7,0	10
<b>GA 50 56-5 FPM</b>	50	56	5,0	8
<b>GA 60 70-7 FPM</b>	60	70	7,0	10
<b>GA 63 75-7 FPM</b>	63	75	7,0	10
<b>GA 70 80-7 FPM</b>	70	80	7,0	10