



### Properties

<b>Design</b>	Rod packing set
<b>Operating pressure</b>	up to 600 bar
<b>Sliding speed max.</b>	1,0 m/s
<b>Temp. min.</b>	-30 °C
<b>Temp. max.</b>	110 °C
<b>Media</b>	Mineral oils Water emulsions
<b>Installation</b>	on one-piece pistons
<b>Material</b>	(1) Dynamic seal: PA + glass fibre (2) Static seal: NBR
<b>Application</b>	Hydraulics



Toleranz / Tolerance		
D	d	L
H9	h9	+0,20 0

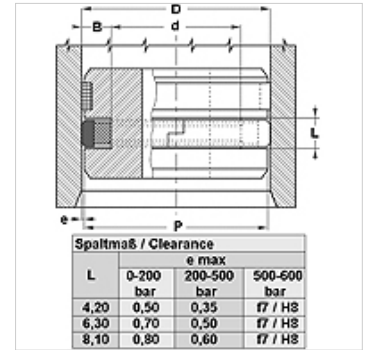

### Description

- Low spatial requirement.
- High extrusion resistance.
- Easy fitting without special tools
- High abrasion resistance.
- low break-loose torque and dynamic friction
- Long service life.

### Item

Identification	D (mm)	d (mm)	L (mm)
GPK 90-1	90	69,0	8,1
GPK 100-1	100	79,0	8,1
GPK 110-1	110	89,0	8,1
GPK 120-1	120	99,0	8,1
GPK 125-1	125	104,0	8,1
GPK 130-1	130	109,0	8,1
GPK 140	140	119,0	8,1
GPK 150	150	129,0	8,1
GPK 160	160	139,0	8,1
GPK 180	180	159,0	8,1
GPK 190	190	169,0	8,1
GPK 200	200	179,0	8,1