


# GPS LP

Piston packing set, GPS-LP


**HANSA FLEX**

## Properties

Operating pressure	up to 400 bar
Sliding speed max.	0,5 m/s
Temp. min.	-30 °C
Temp. max.	80 °C
Media	Mineral oils
Installation	on one-piece pistons A on multi-part pistons B
Material	(1) Dynamic seal: PUR (2) Static seal: NBR



Toleranz / Tolerance		
D	d	L
H9	+0,1 0	+0,2 0

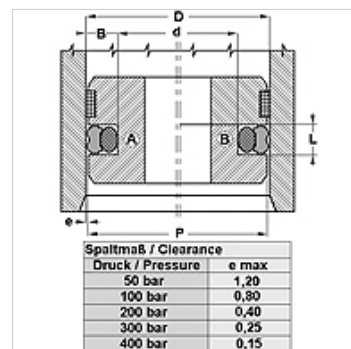

## Description

Easy assembly.  
Low spatial requirement.  
High abrasion resistance.  
Extremely good sealing effect.

## Ordering information

We are able to produce seals with diameters of 20 to 510 mm with short lead times.

Item			
Identification	D (mm)	d (mm)	L (mm)
GPS 35-1-LP	35,00	24,00	4,2
GPS 38-LP	38,00	30,50	3,2
GPS 130-1-LP	130,00	109,00	8,1