



Properties

| | |
|---------------------------|---|
| Operating pressure | up to 400 bar |
| Sliding speed max. | 0,5 m/s |
| Temp. min. | -30 °C |
| Temp. max. | 80 °C |
| Media | Mineral oils |
| Installation | on one-piece pistons A on multi-part pistons B |
| Material | (1) Dynamic seal: PUR (2) Static seal: NBR |



| Toleranz / Tolerance | | |
|----------------------|-----------|-----------|
| D | d | L |
| H9 | +0,1 0 | +0,2 0 |

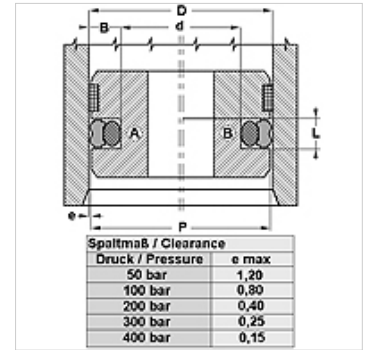

Description

Easy assembly.
Low spatial requirement.
High abrasion resistance.
Extremely good sealing effect.

Ordering information

We are able to produce seals with diameters of 20 to 510 mm with short lead times.

Item

| Identification | D (mm) | d (mm) | L (mm) |
|----------------|-----------|-----------|-----------|
| GPS 35-1-LP | 35,00 | 24,00 | 4,2 |
| GPS 38-LP | 38,00 | 30,50 | 3,2 |
| GPS 130-1-LP | 130,00 | 109,00 | 8,1 |