
IGRL B
Rod seal IGRL-B

Properties

Design	Rod packing set
Operating pressure	up to 700 bar
Sliding speed max.	15,0 m/s
Temp. min.	-30 °C
Temp. max.	110 °C
Media	Mineral oils Water emulsions
Installation	first bend the O-ring and then the PTFE ring into a kidney shape and press into the locating groove (from 30 mm).
Material	(1) Dynamic seal: PTBR (2) Static seal: NBR
Application	Hydraulics




Spaltmaß / Clearance

L	e max 0-200 bar	200-400 bar	400-700 bar
2,2 - 3,2	0,15	0,10	f7 / H8
4,2 - 6,3	0,25	0,15	f7 / H8
8,1	0,40	0,20	f7 / H8

Toleranz / Tolerance

d	D	L
H8 / F7	H9	0/+0,2

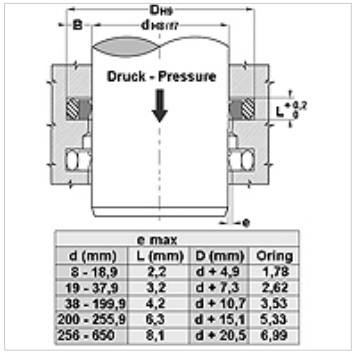

e max

d (mm)	L (mm)	D (mm)	Oring
8 - 18,9	2,2	d + 4,9	1,78
19 - 37,9	3,2	d + 7,3	2,62
38 - 199,9	4,2	d + 10,7	3,53
200 - 255,9	6,3	d + 15,1	5,33
256 - 650	8,1	d + 20,5	6,99

Description

Low spatial requirement.
High extrusion resistance.
low break-loose torque and dynamic friction
Long service life.

Ordering information

We are able to produce GR/IGRL seals with diameters 20 to 510 mm with short lead times. Dimensions can be calculated from table 44.1.

Item

Identification	d (mm)	D (mm)	L (mm)
IGRL 0200 B 554470	20	27,3	3,2
IGRL 0220 B 554470	22	29,3	3,2
IGRL 0250 B 554470	25	32,3	3,2
IGRL 0280 B 554470	28	35,3	3,2
IGRL 0300 B 554470	30	37,3	3,2
IGRL 0350 B 554470	35	42,3	3,2
IGRL 0360 B 554470	36	43,3	3,2
IGRL 0400 B 554470	40	50,7	4,2
IGRL 0450 B 554470	45	55,7	4,2
IGRL 0500 B 554470	50	60,7	4,2
IGRL 0550 B 554470	55	65,7	4,2
IGRL 0560 B 554470	56	66,7	4,2
IGRL 0600 B 554470	60	70,7	4,2
IGRL 0650 B 554470	65	75,7	4,2
IGRL 0700 B 554470	70	80,7	4,2
IGRL 0800 B 554470	80	90,7	4,2
IGRL 0900 B 554470	90	100,7	4,2
IGRL 1000 B 554470	100	110,7	4,2
IGRL 1300 B 554470	130	140,7	4,2

Despite careful checking, we cannot guarantee the accuracy of all information included on this site, and we accept no liability.