

# NPSL
Combination element NPSL

## Properties

| | |
|---|---|
| **Design** | Rod wiper seal |
| **Operating pressure** | up to 10 bar |
| **Sliding speed max.** | 1,0 m/s |
| **Temp. min.** | -30 °C |
| **Temp. max.** | 90 °C |
| **Media** | Mineral oils<br>Water-air |
| **Installation** | in open grooves B |
| **Material** | NBR 75° Shore A |
| **Application** | Pneumatics |




| Toleranz / Tolerance | | | | |
|---|---|---|---|---|
| d | D | M | A | E |
| H8 / f8 | H10 | ± 0,10 | +0,20<br>0 | +0,25<br>0 |

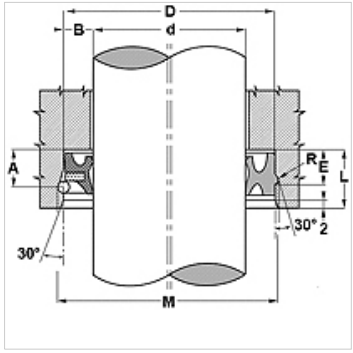


## Description

Low-friction seal.
Combination element, seal/wiper.

## Item

| Identification | d (mm) | D (mm) | h (mm) | H (mm) | M (mm) | A (mm) | R (mm) |
|---|---|---|---|---|---|---|---|
| **NPSL 16 26-7** | 16 | 26 | 7,0 | 9,5 | 28,00 | 8,50 | 1,10 |
| **NPSL 18 26-6** | 18 | 26 | 6,0 | 8,5 | 28,00 | 7,50 | 1,10 |
| **NPSL 20 30-7** | 20 | 30 | 7,0 | 9,5 | 32,00 | 8,80 | 1,40 |
| **NPSL 22 32-7** | 22 | 32 | 7,0 | 9,5 | 34,50 | 8,80 | 1,40 |
| **NPSL 25 35-7** | 25 | 35 | 7,0 | 9,5 | 37,50 | 8,80 | 1,40 |
| **NPSL 30 40-7** | 30 | 40 | 7,0 | 9,5 | 42,50 | 8,80 | 1,40 |
| **NPSL 32 42-7** | 32 | 42 | 7,0 | 9,5 | 44,50 | 8,80 | 1,40 |
| **NPSL 40 50-7** | 40 | 50 | 7,0 | 9,5 | 52,50 | 8,80 | 1,40 |

*Despite careful checking, we cannot guarantee the accuracy of all information included on this site, and we accept no liability.*