


# HK CK XCN

## Non-return valve CK



Properties	
Design	Pilot-controlled, without relief Steel seat
Operating pressure	max. 350 bar

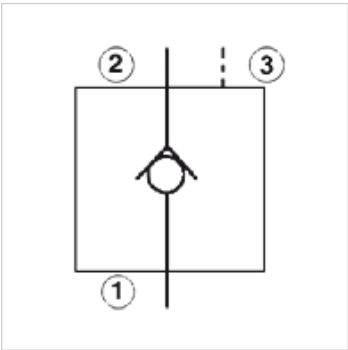

**Description**  
 pressure at connection 2 decreases the required control pressure

Item								
Identification	Qmax (L/min)	A (mm)	B (mm)	Screw-in housing	Screw-in thread	AF (mm)	Tightening torque (N-m)	Weight (kg)
HK CK CB XCN	60	30,0	35,0	HK ECU / HK ECUS	T-11A	22	50,0	0,5
HK CK EB XCN	120	35,0	35,0	HK BCV / HK BCVS / HK BCW / HK BCWS	T-2A	28	65,0	0,5

Accessories	
HK GEH BC	Valve housing for cartridge valve T-2A
HK GEH EC	Valve housing for cartridge valve T-11A
HK HR SUN	Hand wheel for cartridge valve SUN