
HK HV RK

2-way ball valve, 700 bar, in block design

Properties

Operating pressure	max. 700 bar
Volumetric flow	max. 27 l/min
Connection 1 + 2	NPT internal thread
Material	Steel housing, ball and operating shaft



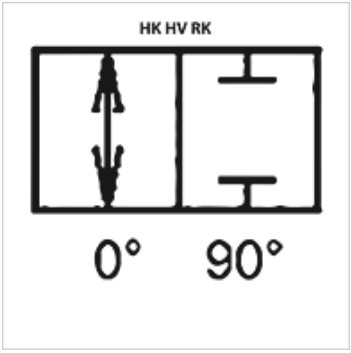

Item

Identification	Thread	Width (mm)	Length (mm)	AF (mm)	Weight (kg)
HK HV1 RK	1/4" NPT	25	50	22	0,55
HK HV2 RK	3/8" NPT	35	80	27	0,55

Qmax - max intake volumetric flow – AF = Width across flats

Accessories

NY 2100	Thermoplastic extreme pressure hose
GKS	Rubber antikink protection
PNY 2100 HN	Swage nipple, AGN
PHY 2100	Swage ferrule, NY 2100
SKL HN SP	Screwed coupling, loose half
SKL ZUBS SP	Dust protection for SKL...SP
SKF IN SP	Screwed coupling fixed half
SKF ZUBS SP	Dust protection for SKF...SP

Despite careful checking, we cannot guarantee the accuracy of all information included on this site, and we accept no liability.