HK K C E-Motor 12V


DC 12V electric motor

HANSA-FLEX

Properties

Design	Direct current motor for industrial applications
Voltage	12 V



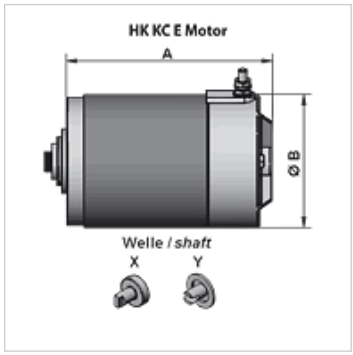

Item

Identificatic	A (mm)	Ø B (mm)	Design	Po-wer (kW)	Direction of rotation	Speed max. (rpm)	Cyclic duration factor S2 operation (min)	Cyclic duration factor S3 operation (%)	Protec-tion class	Shaft	Weig-ht (kg)
HK KC 40	158,5	80,0	-	0,5	reversible	2500	5,0	17,0	IP 54	type Y Ø15.6 x 6.5 x 10.5	2,60
HK KC 78	215,5	112,5	with fan	1,5	clockwise rotating	2300	4,0	14,0	IP 23	type X Ø17.9 x 8.3 x 9.0	7,72
HK KC 85	158,5	80,0	with thermal contact	0,8	reversible	3500	4,0	9,0	IP 44	type Y Ø15.6 x 6.5 x 10.5	2,60
HK KC 91	173,5	114,0	-	1,6	clockwise rotating	2600	3,0	7,5	IP 54	type X Ø17.9 x 8.3 x 9.0	6,80
HK KC 96	207,5	131,0	with thermal contact	2,4	clockwise rotating	2600	1,0	8,0	IP 54	type X Ø16.8 x 8.0 x 7.0	11,28
HK KC 98	183,0	114,0	-	1,5	clockwise rotating	2300	2,0	8,0	IP 54	type X Ø17.9 x 8.3 x 9.0	7,14
HK KC 102	173,5	114,0	with thermal contact	1,6	clockwise rotating	2600	3,0	7,5	IP 54	type X Ø17.9 x 8.3 x 9.0	6,70

Accessories

HK K REL	Start relay for DC electric motor
HK K CAP	Cap for DC electric motors

Despite careful checking, we cannot guarantee the accuracy of all information included on this site, and we accept no liability.