


HK K C E-Motor 48V

DC 48V electric motor

HANSA FLEX

Properties

Design	Direct current motor for industrial applications
Voltage	48 V

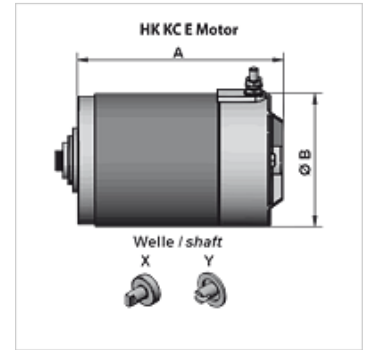

Item

Identificatio	A	Ø B	Po- wer	Direction of rota- tion	Speed max.	Cyclic duration factor S2 operation	Cyclic duration factor S3 operation	Protec- tion class	Shaft	Wei- ght
	(mm)	(mm)	(kW)		(rpm)	(min)	(%)			(kg)
HK KC 86	183,0	114,0	2,0	clockwise rotating	2500	1,0	5,0	IP 54	type X Ø17.9 x 8.3 x 9.0	7,3

Accessories

HK K REL	Start relay for DC electric motor
HK K CAP	Cap for DC electric motors