


# HK K C E-Motor 48V

DC 48V electric motor



Properties	
Design	Direct current motor for industrial applications
Voltage	48 V

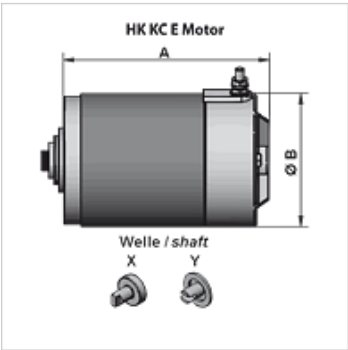

Item										
Identificatio	Ø B	Power	Direction of rota-	Speed	Cyclic duration factor	Cyclic duration factor	Protection class	Shaft	Weight	
(mm)	(mm)	(kW)	tion	max.	S2 operation	S3 operation			(kg)	
HK KC 86	183,0	114,0	2,0	clockwise rotating	2500	1,0	5,0	IP 54	type X Ø17.9 x 8.3 x 9.0	7,3

Accessories	
HK K REL	Start relay for DC electric motor
HK K CAP	Cap for DC electric motors