


HK K C E-Motor 48V

DC 48V electric motor

HANSA FLEX

Properties

| | |
|----------------|--------------------------------------------------|
| Design | Direct current motor for industrial applications |
| Voltage | 48 V |

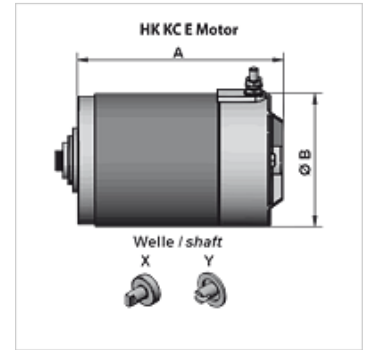

Item

| Identificatio A | Ø B | Po- wer (kW) | Direction of rota- tion | Speed max. (rpm) | Cyclic duration factor S2 operation (min) | Cyclic duration factor S3 operation (%) | Protec- tion class | Shaft | Wei- ght (kg) | |
|-----------------|-------|--------------------|----------------------------|------------------------|-------------------------------------------------|-----------------------------------------------|-----------------------|-------|--------------------------|-----|
| HK KC 86 | 183,0 | 114,0 | 2,0 | clockwise rotating | 2500 | 1,0 | 5,0 | IP 54 | type X Ø17.9 x 8.3 x 9.0 | 7,3 |

Accessories

| | |
|-----------------|-----------------------------------|
| HK K REL | Start relay for DC electric motor |
| HK K CAP | Cap for DC electric motors |