


# HK K C E-Motor 48V

DC 48V electric motor

**HANSA****FLEX**

## Properties

Design	Direct current motor for industrial applications
Voltage	48 V

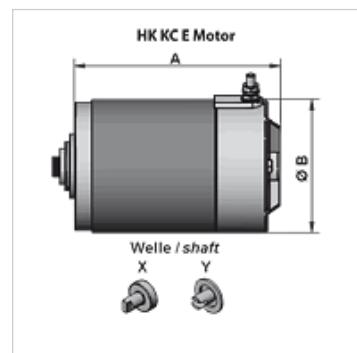

## Item

Identificatio n	A (mm)	Ø B (mm)	Po- wer (kW)	Direction of rota- tion	Speed max. (rpm)	Cyclic duration factor S2 operation (min)	Cyclic duration factor S3 operation (%)	Protec- tion class	Shaft	Wei- ght (kg)
HK K C 86	183,0	114,0	2,0	clockwise rotating	2500	1,0	5,0	IP 54	type X Ø17.9 x 8.3 x 9.0	7,3

## Accessories

HK K REL	Start relay for DC electric motor
HK K CAP	Cap for DC electric motors