


# HK K C E-Motor 48V

DC 48V electric motor

**HANSA FLEX**

## Properties

<b>Design</b>	Direct current motor for industrial applications
<b>Voltage</b>	48 V

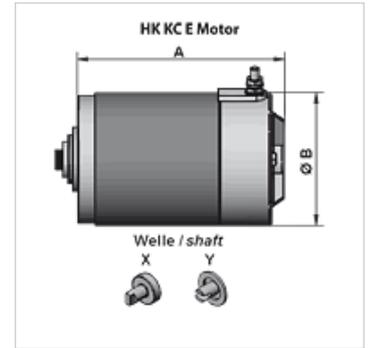

## Item

Identificatio A	Ø B	Po- wer (kW)	Direction of rota- tion	Speed max. (rpm)	Cyclic duration factor S2 operation (min)	Cyclic duration factor S3 operation (%)	Protec- tion class	Shaft	Wei- ght (kg)	
HK KC 86	183,0	114,0	2,0	clockwise rotating	2500	1,0	5,0	IP 54	type X Ø17.9 x 8.3 x 9.0	7,3

## Accessories

<b>HK K REL</b>	Start relay for DC electric motor
<b>HK K CAP</b>	Cap for DC electric motors