


# HK K C E-Motor 48V

DC 48V electric motor

## Properties

<b>Design</b>	Direct current motor for industrial applications
<b>Voltage</b>	48 V

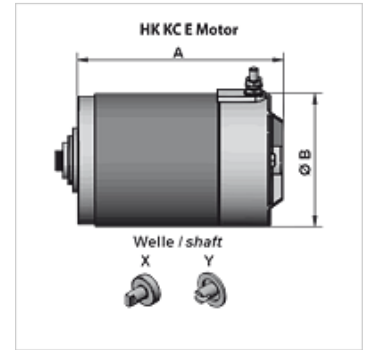

## Item

Identificatio	A	Ø B	Po- wer	Direction of rota- tion	Speed max.	Cyclic duration factor S2 operation	Cyclic duration factor S3 operation	Protec- tion class	Shaft	Wei- ght
	(mm)	(mm)	(kW)		(rpm)	(min)	(%)			(kg)
<b>HK KC 86</b>	183,0	114,0	2,0	clockwise rotating	2500	1,0	5,0	IP 54	type X Ø17.9 x 8.3 x 9.0	7,3

## Accessories

<b>HK K REL</b>	Start relay for DC electric motor
<b>HK K CAP</b>	Cap for DC electric motors