HK K C E-Motor 48V

DC 48V electric motor

Properties

Design	Direct current motor for industrial applications
Voltage	48 V



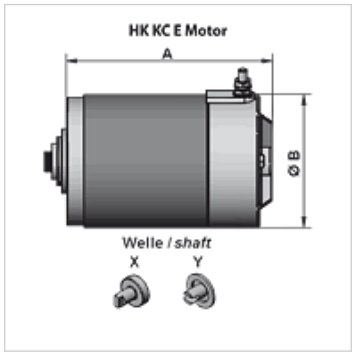

Item

Identificatio	A (mm)	Ø B (mm)	Po-wer (kW)	Direction of rota-tion	Speed max. (rpm)	Cyclic duration factor S2 operation (min)	Cyclic duration factor S3 operation (%)	Protec-tion class	Shaft	Wei-ght (kg)
HK KC 86	183,0	114,0	2,0	clockwise rotating	2500	1,0	5,0	IP 54	type X Ø17.9 x 8.3 x 9.0	7,3

Accessories

HK K REL	Start relay for DC electric motor
HK K CAP	Cap for DC electric motors

Despite careful checking, we cannot guarantee the accuracy of all information included on this site, and we accept no liability.