
KT UEM
Conical nozzle with union nut

HANSA-FLEX

Properties

Application	in construction, mining and tunnel building
Connection 1	BSP nut thread
Sealing form 1	Outer cone
Connection 2	Hose connection
Standard	DIN 8537 / 20 033
Scope of supply	Union nut and conical nozzle
Temp. min.	-40 °C
Temp. max.	95 °C
Media	Compressed air, water
Material	Steel Malleable cast iron
Surface	electro galvanised

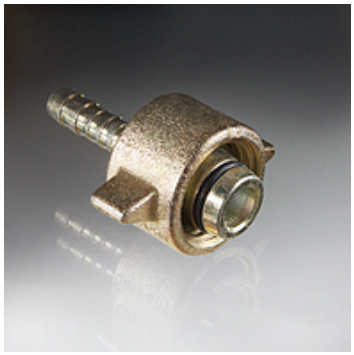

Note

To be integrated with DIN 20039 B hose clamps.
Conical nozzles 1:3 cone generally with additional O-ring seal.

Item

Identification	for hose ID (mm)	G1	Ø ID (mm)	Length (mm)	b (mm)	Cone	Ø Safety collar (mm)	Operating pressure
KT UEM 3/4-10 MM	10	G 3/4" -14	8,00	70	58	1:4	21	PN 25
KT UEM 3/4-13 MM	13	G 3/4" -14	10,00	79	58	1:4	21	PN 25
KT UEM 3/4-15 MM	15	G 3/4" -14	12,00	79	58	1:4	26	PN 25
KT UEM 3/4-19 MM	19	G 3/4" -14	13,00	80	58	1:4	33	PN 25
KT UEM 1-10 MM	10	G 1" -11	7,50	83	65	1:3	21	PN 25
KT UEM 1-13 MM	13	G 1" -11	10,00	85	65	1:3	22	PN 25
KT UEM 1-15 MM	15	G 1" -11	12,00	85	65	1:3	26	PN 25
KT UEM 1-19 MM	19	G 1" -11	15,00	85	65	1:3	33	PN 25
KT UEM 1-25 MM	25	G 1" -11	16,00	90	65	1:3	38	PN 25

G1 = Thread of connection 1 – Ø ID = Through hole

Spare parts

UEM KT	Union nut for conical nozzles

Despite careful checking, we cannot guarantee the accuracy of all information included on this site, and we accept no liability.