
KT UEM RD
Conical nozzle with union nut

HANSA-FLEX

Properties

Application	in construction, mining and tunnel building
Connection 1	Rund nut thread
Connection 2	Hose connection
Standard	DIN 8537 / 20 033
Scope of supply	Union nut and conical nozzle
Temp. min.	-40 °C
Temp. max.	95 °C
Media	Compressed air, water
Material	Steel Malleable cast iron
Surface	electro galvanised

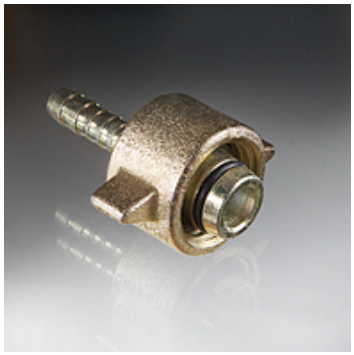

Note

To be integrated with DIN 20039 B hose clamps.
Conical nozzles 1:3 cone generally with additional O-ring seal.

Item

Identification	for hose ID (mm)	G1	Ø ID (mm)	Length (mm)	b (mm)	Cone	Ø Safety collar (mm)	Operating pressure
KT UEM RD32-10 MM	10	Rd 32 x 1/8"	7,50	90	65	1:3	21	PN 25
KT UEM RD32-13 MM	13	Rd 32 x 1/8"	10,00	83	65	1:3	22	PN 25
KT UEM RD32-15 MM	15	Rd 32 x 1/8"	12,00	85	65	1:3	26	PN 25
KT UEM RD32-19 MM	19	Rd 32 x 1/8"	15,00	85	65	1:3	33	PN 25
KT UEM RD32-25 MM	25	Rd 32 x 1/8"	16,00	90	65	1:3	38	PN 25
KT UEM RD38-25 MM	25	Rd 38 x 1/8"	19,00	98	76	1:3	38	PN 25
KT UEM RD46-32 MM	32	Rd 46 x 1/6"	25,00	124	86	1:3	50	PN 25
KT UEM RD55-35 MM	35	Rd 55 x 1/6"	30,00	131	95	1:3	55	PN 25
KT UEM RD55-38 MM	38	Rd 55 x 1/6"	31,00	131	95	1:3	55	PN 25
KT UEM RD62-42 MM	42	Rd 62 x 1/6"	35,00	139	105	1:3	63	PN 25
KT UEM RD75-50 MM	50	Rd 75 x 1/6"	45,00	149	137	1:3	77	PN 25
KT UEM RD75-53 MM	53	Rd 75 x 1/6"	45,00	149	137	1:3	77	PN 25
KT UEM RD105-75 MM	75	Rd 105 x 1/4"	67,00	206	158	1:3	110	PN 25

G1 = Thread of connection 1 – Ø ID = Through hole

Spare parts

UEM KT RD	Union nut for conical nozzles

Despite careful checking, we cannot guarantee the accuracy of all information included on this site, and we accept no liability.