
MV AG

Mortar coupling, male part AGR

Properties

Application	for mortar, concrete, screed supply on pumps, sprayers and plastering machines
Connection 1	BSP external thread, cylindrical
Connection 2	Coupling male connection
Special features	TÜV tested
Media	Mortar, concrete, screed
Material	Steel Malleable cast iron
Surface	electro galvanised

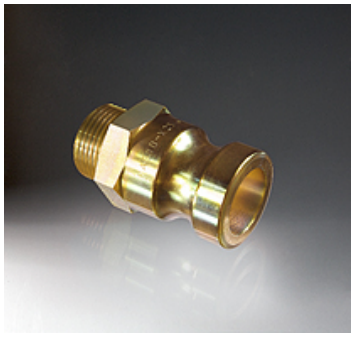

Note

Note: Parts must only replaced with parts of the same type sizes!

Item

Identification	G1	Type size	Ident dimension	Max. working pressure (bar)	System
MV AG 10/25	G 1" -11	25	35,0	50	22 / 23,5
MV AG 10-X25	G 1" -11	X25	41,0	50	22 / 23,5
MV AG 54/35	G 1.1/4" -11	35	49,5	50	22
MV AG 15/42	G 1.1/2" -11	42	53,0	50	22 / 23,5
MV AG 20/50	G 2" -11	50	63,0	50	22

Despite careful checking, we cannot guarantee the accuracy of all information included on this site, and we accept no liability.