
PVC ANTI AB PU

PVC suction and delivery hose

HANSA-FLEX

Properties

Application	Construction industry Agricultural technology
Special features	weatherproof exceptionally abrasion resistant flexible .
Inner layer	Polyurethane
Insert	Hard PVC spiral
Outer layer	Polyurethane
Colour	metallic green
Temp. min.	-25 °C
Temp. max.	55 °C
Media	Cereals Cement Gravel Granulates

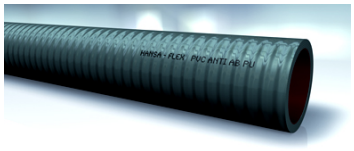

Item

Identification	Inches	Internal Ø (mm)	Wall thickness (mm)	BD* at 20°C (bar)	Vacuum (bar)	Min. bending radius (mm)	Roll length (m)
PVC ANTI AB 63-6 PU	2.1/2"	63	5,5	4,0	0,7	250	30 / 50
PVC ANTI AB 76-6.5 PU	3"	76	6,7	4,0	0,7	300	30 / 50
PVC ANTI AB 102-7 PU	4"	102	8,5	3,0	0,7	400	30 / 50
PVC ANTI AB 127-8 PU	5"	127	9,5	2,5	0,7	510	30
PVC ANTI AB 152-9 PU	6"	152	11,0	2,0	0,7	610	20

BD = Working pressure

Despite careful checking, we cannot guarantee the accuracy of all information included on this site, and we accept no liability.