
PVC QUAD

PVC suction and delivery hose

Properties

Application	Agricultural technology
Special features	considerable weight reduction smooth outer cover extremely versatile
Inner layer	PVC
Insert	rectangular PVC spiral, anthracite
Outer layer	PVC
Colour	orange
Temp. min.	-25 °C
Temp. max.	60 °C
Media	Water, etc.

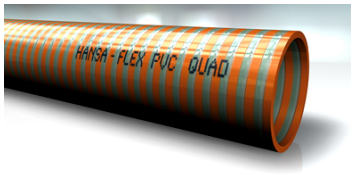

Description

Plastic suction and pressure hose for cleaning and draining for use with process water and liquid manure

Item

Identification	Inches	Internal Ø (mm)	External Ø (mm)	Wall thickness (mm)	BD* at 20°C (bar)	Vacuum (bar)	Min. bending radius (mm)	Roll length (m)
PVC QUAD 51-4	2"	51	59	4,00	6,5	0,9	204	50
PVC QUAD 76-5	3"	76	85	5,00	5,5	0,9	304	50
PVC QUAD 102-7.5	4"	102	112	7,50	4,5	0,9	408	50
PVC QUAD 110-5.5	4.3/8"	110	121	5,50	4,0	0,9	440	20
PVC QUAD 127-6.5	5"	127	140	6,50	3,5	0,9	508	20
PVC QUAD 152-7	6"	152	166	7,00	3,0	0,9	608	20

BD = Working pressure

Despite careful checking, we cannot guarantee the accuracy of all information included on this site, and we accept no liability.