


# PA 700 AJF 45

Swage fitting, ORFS angle 45°

**HANSA FLEX**

## Properties

|                        |                                      |
|------------------------|--------------------------------------|
| <b>Application</b>     | Swage fitting for HD 400 hoses       |
| <b>Connection 1</b>    | UN/UNF nut threads                   |
| <b>Sealing form 1</b>  | flat sealing                         |
| <b>Short code</b>      | ORFS                                 |
| <b>Standard</b>        | ISO 8434-3                           |
| <b>Integration</b>     | with pull-out protection (interlock) |
| <b>Scope of supply</b> | Swage nipple + swage ferrule         |
| <b>Material</b>        | Steel                                |
| <b>Surface</b>         | electro galvanised                   |

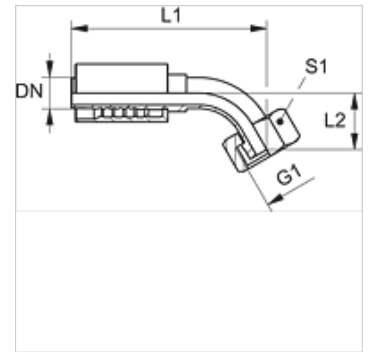

## Item

| Identification | DN | Size | Inches | Operating pressure<br>(bar) | G1             | L1<br>(mm) | L2<br>(mm) | S1 |
|----------------|----|------|--------|-----------------------------|----------------|------------|------------|----|
| PA 713 AJF 45  | 12 | 8    | 1/2"   | 413,0                       | 11/16" -16 UN  | 91,5       | 21,5       | 27 |
| PA 716 AJF 45  | 16 | 10   | 5/8"   | 413,0                       | 1" -14 UNS     | 111,0      | 20,0       | 30 |
| PA 720 AJF 45  | 19 | 12   | 3/4"   | 413,0                       | 1.3/16" -12 UN | 133,0      | 26,5       | 36 |
| PA 725 AJF 45  | 25 | 16   | 1"     | 413,0                       | 1.7/16" -12 UN | 160,5      | 31,0       | 41 |