


PA 700 AOS 90

Swage fitting, DKOS angle 90°

HANSA FLEX

Properties

Application	Swage fitting for HD 400 hoses
Connection 1	metric nut thread
Sealing form 1	24° outer cone with O-ring
Short code	DKOS
Standard	ISO 8434-1
Integration	with pull-out protection (interlock)
Scope of supply	Swage nipple + swage ferrule
Material	Steel
Surface	electro galvanised
Series	heavy

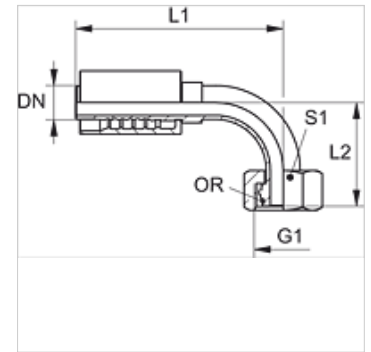

Item

Identification	DN	Size	Inches	Operating pressure (bar)	G1	for external pipe Ø (mm)	L1 (mm)	S1	L2 (mm)	OR
PA 710 AOS 08 90	10	6	3/8"	630,0	M 20 x 1.5	12	-	24	-	10.0 x 1.5
PA 710 AOS 90	10	6	3/8"	630,0	M 22 x 1.5	14	71,7	27	-	12.0 x 2.0
PA 713 AOS 90	12	8	1/2"	420,0	M 24 x 1.5	16	87,0	30	45,0	13.0 x 2.0
PA 713 AOS 16 90	12	8	1/2"	420,0	M 30 x 2	20	86,5	36	49,5	17.5 x 2.5
PA 716 AOS 90	16	10	3/8"	420,0	M 30 x 2	20	106,5	36	49,5	17.5 x 2.5
PA 720 AOS 16 90	19	12	3/4"	420,0	M 30 x 2	20	125,5	36	57,5	17.5 x 2.5
PA 720 AOS 90	19	12	3/4"	420,0	M 36 x 2	25	125,5	46	62,0	20.0 x 2.5
PA 720 AOS 90 SW41	19	12	3/4"	420,0	M 36 x 2	25	125,5	41	62,0	20.0 x 2.5
PA 720 AOS 25 90	19	12	3/4"	420,0	M 42 x 2	30	129,0	50	71,5	25.0 x 2.5
PA 725 AOS 20 90	25	16	1"	420,0	M 36 x 2	25	144,0	46	71,0	20.0 x 2.5
PA 725 AOS 90	25	16	1"	420,0	M 42 x 2	30	157,5	50	72,5	25.0 x 2.5
PA 725 AOS 32 90	25	16	1"	420,0	M 52 x 2	38	154,5	60	84,5	33.0 x 2.5