
PA 700 SF
Swage fitting, SFL

Properties

Application	Swage fitting for HD 400 hoses
Connection 1	SAE flange connection 3000 PSI
Sealing form 1	flat seal with SF O-ring
Short code	SFL
Standard	SAE J518 ISO 6162-1
Integration	with pull-out protection (interlock)
Scope of supply	Swage nipple + swage ferrule
Material	Steel
Surface	electro galvanised



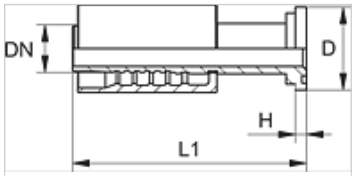

Item

Identification	DN	Size	Inches	Flange size	Operating pressure (bar)	D (mm)	H (mm)	L1 (mm)
PA 713 SF	12	8	1/2"	1/2"	350,0	30,2	6,7	90,4
PA 713 SF 20	12	8	1/2"	3/4"	350,0	38,1	6,7	91,6
PA 716 SF 20	16	10	3/8"	3/4"	350,0	38,1	6,7	102,6
PA 720 SF	19	12	3/4"	3/4"	350,0	38,1	6,7	116,5
PA 720 SF 25	19	12	3/4"	1"	320,0	44,5	8,0	119,5
PA 725 SF 20	25	16	1"	3/4"	320,0	38,1	6,7	132,0
PA 725 SF	25	16	1"	1"	320,0	44,5	8,0	135,5
PA 725 SF 32	25	16	1"	1.1/4"	280,0	50,8	8,0	138,5

Despite careful checking, we cannot guarantee the accuracy of all information included on this site, and we accept no liability.