


# PA 700 SF6

Swage fitting, SFS

## Properties

<b>Application</b>	Swage fitting for HD 400 hoses
<b>Connection 1</b>	SAE flange connection 6000 PSI
<b>Sealing form 1</b>	flat seal with SF O-ring
<b>Short code</b>	SFS
<b>Standard</b>	SAE J518 ISO 6162-2
<b>Integration</b>	with pull-out protection (interlock)
<b>Scope of supply</b>	Swage nipple + swage ferrule
<b>Material</b>	Steel
<b>Surface</b>	electro galvanised

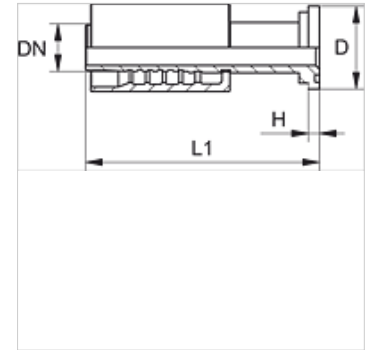

Item									
Identification	DN	Size	Inches	Flange size	Operating pressure (bar)	D (mm)	H (mm)	L1 (mm)	
PA 713 SF6	12	8	1/2"	1/2"	420,0	31,8	7,7	90,4	
PA 713 SF6 20	12	8	1/2"	3/4"	420,0	41,3	8,8	93,9	
PA 716 SF6 13	16	10	5/8"	1/2"	420,0	31,8	7,7	108,0	
PA 716 SF6 20	16	10	5/8"	3/4"	420,0	41,3	8,8	102,0	
PA 716 SF6 25	16	10	5/8"	1"	420,0	47,6	9,5	103,0	
PA 720 SF6	19	12	3/4"	3/4"	420,0	41,3	8,8	124,5	
PA 720 SF6 25	19	12	3/4"	1"	420,0	47,6	9,5	129,0	
PA 725 SF6 20	25	16	1"	3/4"	420,0	41,3	8,8	134,0	
PA 725 SF6	25	16	1"	1"	420,0	47,6	9,5	146,5	
PA 725 SF6 32	25	16	1"	1.1/4"	420,0	54,0	10,3	151,0	