
PA 700 SF6
Swage fitting, SFS

Properties

Application	Swage fitting for HD 400 hoses
Connection 1	SAE flange connection 6000 PSI
Sealing form 1	flat seal with SF O-ring
Short code	SFS
Standard	SAE J518 ISO 6162-2
Integration	with pull-out protection (interlock)
Scope of supply	Swage nipple + swage ferrule
Material	Steel
Surface	electro galvanised



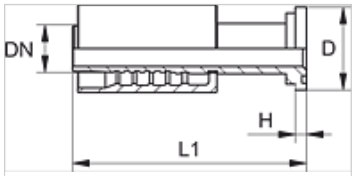

Item

Identification	DN	Size	Inches	Flange size	Operating pressure (bar)	D (mm)	H (mm)	L1 (mm)
PA 713 SF6	12	8	1/2"	1/2"	420,0	31,8	7,7	90,4
PA 713 SF6 20	12	8	1/2"	3/4"	420,0	41,3	8,8	93,9
PA 716 SF6 13	16	10	5/8"	1/2"	420,0	31,8	7,7	108,0
PA 716 SF6 20	16	10	5/8"	3/4"	420,0	41,3	8,8	102,0
PA 716 SF6 25	16	10	5/8"	1"	420,0	47,6	9,5	103,0
PA 720 SF6	19	12	3/4"	3/4"	420,0	41,3	8,8	124,5
PA 720 SF6 25	19	12	3/4"	1"	420,0	47,6	9,5	129,0
PA 725 SF6 20	25	16	1"	3/4"	420,0	41,3	8,8	134,0
PA 725 SF6	25	16	1"	1"	420,0	47,6	9,5	146,5
PA 725 SF6 32	25	16	1"	1.1/4"	420,0	54,0	10,3	151,0

Despite careful checking, we cannot guarantee the accuracy of all information included on this site, and we accept no liability.