


PA 700 SF6 90

Swage fitting, SFS angle 90°

Properties

| | |
|------------------------|--------------------------------------|
| Application | Swage fitting for HD 400 hoses |
| Connection 1 | SAE flange connection 6000 PSI |
| Sealing form 1 | flat seal with SF O-ring |
| Short code | SFS |
| Standard | SAE J518 ISO 6162-2 |
| Integration | with pull-out protection (interlock) |
| Scope of supply | Swage nipple + swage ferrule |
| Material | Steel |
| Surface | electro galvanised |

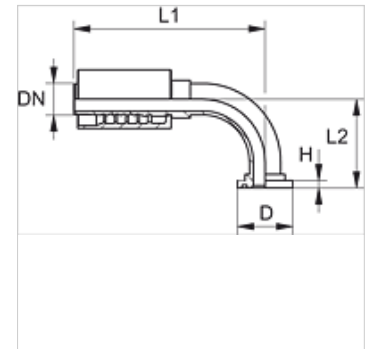

| Item | | | | | | | | | | |
|------------------|----|------|--------|-------------|--------------------------|--------|--------|---------|---------|--|
| Identification | DN | Size | Inches | Flange size | Operating pressure (bar) | D (mm) | H (mm) | L1 (mm) | L2 (mm) | |
| PA 713 SF6 90 | 12 | 8 | 1/2" | 1/2" | 420,0 | 31,8 | 7,7 | 86,0 | 46,0 | |
| PA 713 SF6 20 90 | 12 | 8 | 1/2" | 3/4" | 420,0 | 41,3 | 8,8 | 92,5 | 46,0 | |
| PA 716 SF6 13 90 | 16 | 10 | 5/8" | 1/2" | 420,0 | 31,8 | 7,7 | 108,0 | 48,0 | |
| PA 716 SF6 20 90 | 16 | 10 | 5/8" | 3/4" | 420,0 | 41,3 | 8,8 | 107,5 | 52,5 | |
| PA 716 SF6 25 90 | 16 | 10 | 5/8" | 1" | 420,0 | 47,6 | 9,5 | 108,0 | 57,0 | |
| PA 720 SF6 90 | 19 | 12 | 3/4" | 3/4" | 420,0 | 41,3 | 8,8 | 127,5 | 62,0 | |
| PA 720 SF6 25 90 | 19 | 12 | 3/4" | 1" | 420,0 | 47,6 | 9,6 | 127,5 | 68,0 | |
| PA 725 SF6 20 90 | 25 | 16 | 1" | 3/4" | 420,0 | 41,3 | 8,8 | 152,5 | 70,5 | |
| PA 725 SF6 90 | 25 | 16 | 1" | 1" | 420,0 | 47,6 | 9,6 | 158,0 | 74,0 | |
| PA 725 SF6 32 90 | 25 | 16 | 1" | 1.1/4" | 420,0 | 54,0 | 10,4 | 156,0 | 83,5 | |