


HK SP WPD / SP SET / 6 OE

Emergency hand operation for directional solenoid valve

HANSA FLEX

Properties

| | |
|-----------------|---|
| Design | as snapper or push button |
| Material | Plastic / steel |
| Use | for manual emergency operation of solenoid valves |

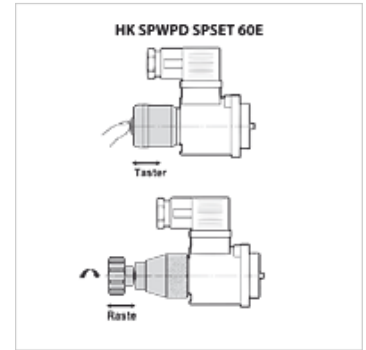

Item

| Identification | for valve type | Design | Weight (kg) |
|------------------------|----------------|------------|-------------|
| HK SP WPD H Q30 | HK DHI | locking | 0,1 |
| HK SP SET 6DH 103500 | HK DHI | Pushbutton | 0,1 |
| HK SP WPD HS | HK DHE DC | locking | 0,1 |
| HK 6 OE 101500 | HK DHE DC | Pushbutton | 0,1 |
| HK 6 OER 102500 | HK DHER AC | Pushbutton | 0,1 |
| HK SP SET 15AE 101500 | HK DKE DC | Pushbutton | 0,1 |
| HK SP WPD KE DC | HK DKE DC | locking | 0,3 |
| HK SP SET 15AE 102500 | HK DKE AC | Pushbutton | 0,1 |
| HK SP SET 15AER 102500 | HK DKER AC | Pushbutton | 0,1 |
| HK 6 OE 102500 | HK DHE AC | Pushbutton | 0,1 |

Accessory for following products

| | |
|----------------|--|
| HK DHE X 00 DC | Solenoid-operated directional control valve size 6 without coil |
| HK DHE X 00 AC | Solenoid-operated directional control valve size 6 without coil |
| HK DKE X 00 AC | Solenoid-operated directional control valve size 10 without coil |
| HK DKE X 00 DC | Solenoid-operated directional control valve size 10 without coil |