
SILO
Silo hose

Properties

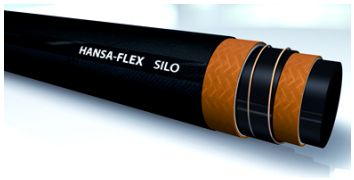

Application	for unloading cement, sand, gravel and granulates from silo transport vehicles.
Special features	abrasion value according to DIN 53516 < 65 mm3
Standard	ISO 1307
Inner layer	highly abrasion resistant insulating natural rubber
Insert	highly tear-resistant synthetic textile insert and copper braid
Outer layer	special synthetic rubber, highly resistant to abrasion, ozone and weather, pricked.
Colour	black
Temp. min.	-40 °C
Temp. max.	70 °C
Media	Cement Sand Gravel Granulates

Item

Identification	Inches	Internal Ø (mm)	External Ø (mm)	Operating pressure (bar)	Burst pressure (bar)	Min. bending radius (mm)	Roll length (m)
SILO 25-6	1"	25,4	37,0	10,0	30	254	40
SILO 32-6	1.1/4"	32,0	44,0	10,0	30	320	40
SILO 38-6	1.1/2"	38,0	50,0	10,0	30	380	40
SILO 51-6.5	2"	50,8	64,5	10,0	30	508	40
SILO 63-7	2.1/2"	63,5	77,0	10,0	30	635	40
SILO 76-7	3"	76,2	90,0	10,0	30	762	40
SILO 90-7	3.1/2"	90,0	104,0	10,0	30	900	40
SILO 102-8	4"	101,6	118,0	10,0	30	1016	40
SILO 127-9.5	5"	127,0	146,0	10,0	30	1270	40
SILO 152-10	6"	152,4	172,0	10,0	30	1524	40
SILO 203-11	8"	203,2	225,0	10,0	30	2032	20
SILO 254-11	10"	254,0	276,0	10,0	30	2540	20

Despite careful checking, we cannot guarantee the accuracy of all information included on this site, and we accept no liability.