
PVC KANAL

PVC-BUNA ditch suction hose, grey

HANSA FLEX

Properties

Special features	specially for use in very cold climates
Standard	ISO 1307
Inner layer	stable, high flexibility, smooth plasticised PVC
Insert	impact and pressure resistant PVC reinforcing spiral
Outer layer	stable, high flexibility, smooth plasticised PVC
Colour	grey
Temp. min.	-40 °C
Temp. max.	50 °C

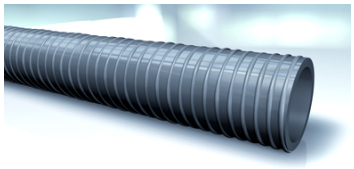

Item

Identification	Inches	Internal Ø (mm)	Wall thickness (mm)	Burst pressure (bar)	Vacuum (bar)	Min. bending radius (mm)
PVC KANAL DN 25	1"	25	4,2	18	0,9	115
PVC KANAL DN 32	1.1/4"	32	4,2	15	0,9	125
PVC KANAL DN 38	1.1/2"	38	4,5	14	0,9	145
PVC KANAL DN 40	-	40	4,5	13	0,9	160
PVC KANAL DN 51	2"	51	5,0	13	0,9	180
PVC KANAL DN 60	-	60	5,0	13	0,9	200
PVC KANAL DN 63	2.1/2"	63	5,5	12	0,9	220
PVC KANAL DN 76	3"	76	5,5	10	0,9	250
PVC KANAL DN 80	-	80	6,0	10	0,9	260
PVC KANAL DN 90	-	90	6,0	9	0,8	305
PVC KANAL DN 102	4"	102	6,5	9	0,8	335

Despite careful checking, we cannot guarantee the accuracy of all information included on this site, and we accept no liability.