HK GEH ZP NG


Steel housing sandwich plate NG6/10 for SAE 2-way cartridge valve

HANSA-FLEX

Properties

Sealing form	O-ring seal
Design	functions in channel A + B optional sealing of a cartridge bore with blank plug (*)
Material	Steel
Operating pressure	max. 350 bar



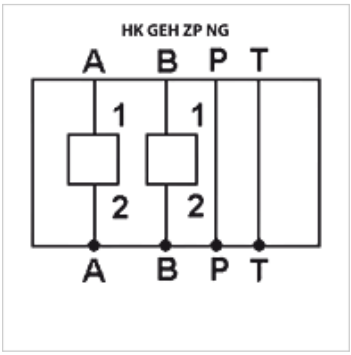

Note

(*) matching blank plugs
for SAE08/2 : PLUG O 08
for SAE10/2 : PLUG O 10
for SAE12/2 : PLUG O 12

Item

Identification	Connection	C (mm)	D (mm)	E (mm)	F (mm)	G (mm)	for valve type	Weight (kg)
HK ZP NG6 C08 AB	Cetop 03 NG 6	45	50	25	100	45	HK EMDV08 - SAE8/2 3/4-16UNF-2B	1,3
HK ZP NG6 C10 AB	Cetop 03 NG 6	45	50	25	100	45	HK EMDV10 - SAE10/2 7/8-14UNF-2B	1,2
HK ZP NG10 C12 AB	Cetop 05 NG 10	75	50	31	160	52	HK EMDV12 - SAE12/2 1.1/16-12UNF-2B	2,1

Accessories

VERSCHLUSS O	Blanking socket

Despite careful checking, we cannot guarantee the accuracy of all information included on this site, and we accept no liability.