


### Properties

Design	without bypass valve, without clogging indicator without filter element
Operating pressure	max. 320 bar

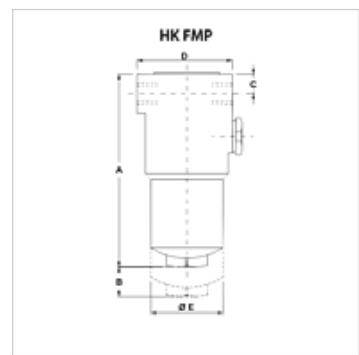

### Note

Measurement "B": clearance required for changing the filter element

### Description

Pressure filter for pipeline installation

Design (Qmax.) for medium ISO VG 46 at 50°C (30 mm<sup>2</sup>/s) at Δptot = 1.25 bar

### Ordering information

Filter element is not included. Please order separately.

Item	Identification	Filter area (m <sup>2</sup> )	Line connection	B (mm)	A (mm)	C (mm)	D (mm)	Ø E (mm)	Weight (kg)
HK FMP 065 1 SG1	374	G 1/2"		100	169	28	85	68	3,9
HK FMP 065 2 SG2	530	G 3/4"		100	200	28	85	68	4,2
HK FMP 065 3 SG2	1064	G 3/4"		100	302	28	85	68	5,7
HK FMP 135 2 SG2	2020	G 1"		125	333	38	104	77	9,4

### Accessories

HK VA OPT Clogging indicator optical

HK VA EL Clogging indicator electrical

### Spare parts

HK HP H Filter element for pressure filter FMP/FHP