


WA VBF RG

Connector ... VBF, red bronze

HANSA FLEX

Properties

| | |
|-----------------------|---|
| Application | Connection fitting for metal hoses |
| Connection 1 | imperial internal thread, cylindrical |
| Sealing form 1 | flat sealing |
| Standard | DIN EN 10226 / ISO 7-1 |
| Construction | straight |
| Application | soldered variant temperature resistant up to 200 °C |
| Design | 3-part threaded connection |
| Material | Red bronze |

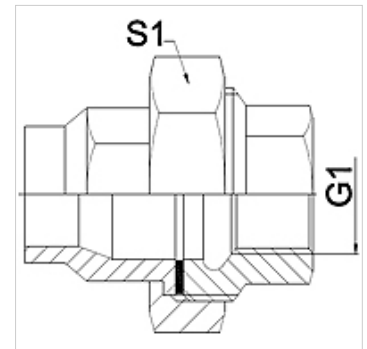

Note

Width across flats values are listed for reference purposes!

Ordering information

Other designs available on request

Item

| Identification | DN | G1 | S1 (mm) |
|----------------|----|---------|------------|
| WA 013 VBF RG | 13 | Rp 1/2" | 30,0 |
| WA 020 VBF RG | 20 | Rp 3/4" | 37,0 |
| WA 025 VBF RG | 25 | Rp 1" | 46,0 |

Product versions

| | |
|------------------|---|
| WA VBF | Connector ... VBF, malleable cast iron, Malleable cast iron |
| WA VBF VA | Connector ... VBF, VA, Stainless steel |