


# WA VCF

Connector ... VCF, malleable cast iron

**HANSA FLEX**

## Properties

<b>Application</b>	Connection fitting for metal hoses
<b>Connection 1</b>	imperial outer thread, conical
<b>Sealing form 1</b>	flat sealing
<b>Standard</b>	DIN EN 10226 / ISO 7-1
<b>Application</b>	soldered variant temperature resistant up to 200 °C
<b>Construction</b>	straight
<b>Design</b>	3-part threaded connection
<b>Material</b>	Malleable cast iron

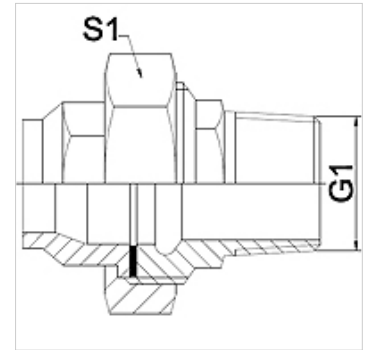

## Note

Width across flats values are listed for reference purposes!

The specified working pressure PN(bar) relates to the working temperature of -20 °C to 120 °C. At working temperature of 120 °C to 200 °C the working pressure PN (bar) reduces to 22,7 bar.

## Ordering information

Other designs available on request

### Item

Identification	DN	PN (bar)	G1	S1 (mm)
WA 006 VCF	6	25	R 1/4"	28,0
WA 013 VCF	13	25	R 1/2"	39,0
WA 020 VCF	20	25	R 3/4"	48,0
WA 025 VCF	25	25	R 1"	55,0
WA 032 VCF	32	25	R 1.1/4"	67,0
WA 040 VCF	40	25	R 1.1/2"	74,0
WA 050 VCF	50	25	R 2"	90,0

## Product versions

<b>WA VCF RG</b>	Connector ... VCF, red bronze, Red bronze
<b>WA VCF VA</b>	Connector ... VCF, VA, Stainless steel