

# EUD P

Piston packing set for one-piece pistons EUD.P


**HANSA FLEX**

## Properties

<b>Design</b>	Piston packing set
<b>Operating pressure</b>	up to 400 bar
<b>Sliding speed max.</b>	0,5 m/s
<b>Temp. min.</b>	-30 °C
<b>Temp. max.</b>	80 °C
<b>Media</b>	Mineral oils
<b>Installation</b>	on one-piece pistons A on multi-part pistons B
<b>Material</b>	(1) Dynamic seal: PUR (3) Guide ring: acetal resin
<b>Application</b>	Hydraulics



Toleranz / Tolerance					
D	d	L	G	M	P
H11	+0,12 0	+0,20 0	+0,10 0	± 0,05	± 0,15

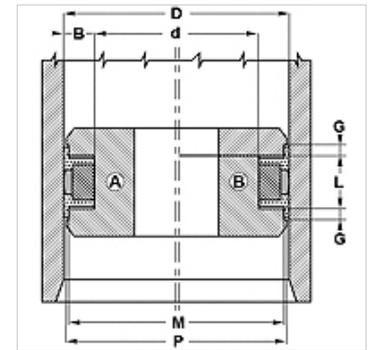

## Description

Extremely good sealing effect at low pressure.  
Low spatial requirement.  
Easy assembly.  
Simple solution.  
High abrasion resistance.

Item	D (mm)	d (mm)	L (mm)	G (mm)	M (mm)	P (mm)
EUD 32 24-P	32	24	10,0	4,00	29	31,0
EUD 40 32-P	40	32	10,0	4,00	37	39,0
EUD 50 40-P	50	40	12,5	4,00	47	49,0
EUD 63 53-P	63	53	12,5	4,00	60	62,0
EUD 80 70-P	80	70	12,5	4,00	77	79,0