

HK PAN

Level/temperature switch HK PAN

HANSA FLEX

Properties

Operating pressure max. 1 bar

Operating temperature max. 70 °C

Connection G 1/2" male


Operating voltage 24 V DC

Electrical connection M12x1, 8-polig

Protection IP IP 65

Material Gasket: NBR

Scope of supply without plug

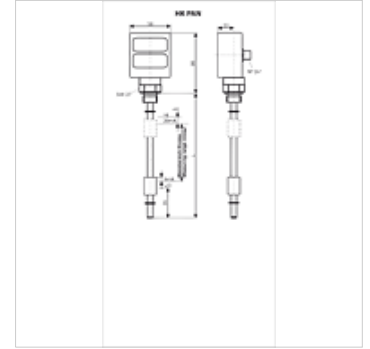

Description

Housing can be rotated to 350°

Output: 2x high-side per parameter (freely programmable, NC/NO, window/hysteresis)

Level measurement: Sensor length 35 mm, display resolution 5 mm

Temperature measurement: -15°C to +100°C (PT100)

Accuracy ±1 % of range limit value

Ordering information

Order M12 plug with cable separately

Item

Identification	L (mm)	Weight (kg)
HK PAN 1 1001	250	1,0
HK PAN 1 1002	370	1,0
HK PAN 1 1003	520	1,0

Accessories

HK PAN M M12 8-pin plug with cable