


# HK DSR

## Pressure sensor controller DSR

### Properties

Operating temperature max.	85 °C
Connection	G 1/4" male, rotatable
Operating voltage	24 V DC
Electrical connection	Round plug connector M 12 x 1, 4-pol.
Material	Housing: Zinc die cast Parts in contact with media: Stainless steel V2A Gasket: NBR
Scope of supply	without plug
protection class	IP 67

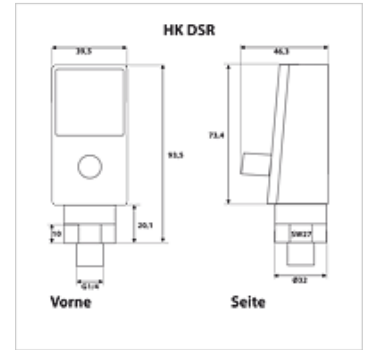

### Description

Compact unit comprising pressure switch, pressure sensor and LED indicator  
Housing can be rotated to 290°  
Output: 2x PNP (freely programmable, NC/NO, window/hysteresis)  
Without analog output  
Accuracy  $\pm 0.5$  % of range limit value  
Min./max. value memory

### Ordering information

Order M12 plug with cable separately

### Item

Identification	Measuring range	Weight (kg)
HK DSR 400 04 17	0 to 400 bar	0,3

### Accessories

HK DSR 4POL M12 4-pin angle plug with cable