


PA 500 A 45 A

Swage fitting, DKM angle 45°

HANSA**FLEX**

Properties

| | |
|-----------------|--------------------------------------|
| Application | Swage fitting for HD 500 hoses |
| Connection 1 | metric nut thread |
| Sealing form 1 | 60° sealing head |
| Short code | DKM |
| Standard | DIN 3863 |
| Integration | with pull-out protection (interlock) |
| Scope of supply | Swage nipple + swage ferrule |
| Material | Steel |
| Surface | electro galvanised |

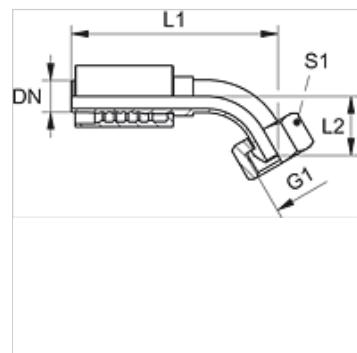

Item

| Identification | DN | Size | Inches | Operating pressure | G1 | L1 (mm) | L2 (mm) | S1 |
|----------------|----|------|--------|--------------------|------------|------------|------------|----|
| PA 532 A 45 A | 31 | 20 | 1 1/4" | WP 63 bar | M 45 x 1.5 | 112,5 | 41,7 | 50 |
| PA 540 A 45 A | 38 | 24 | 1 1/2" | WP 63 bar | M 52 x 1.5 | 125,5 | 43,1 | 60 |
| PA 550 A 45 A | 51 | 32 | 2" | WP 40 bar | M 65 x 2 | 142,0 | 51,6 | 75 |