



# HK CTLM

Inserted piston for hydraulic cylinders

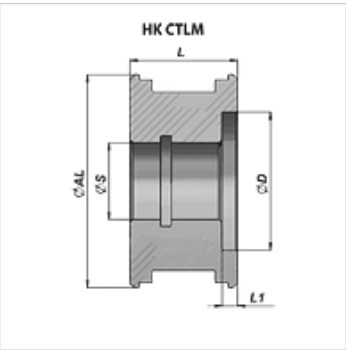

| Properties |              |
|------------|--------------|
| Material   | Steel 9SMn28 |

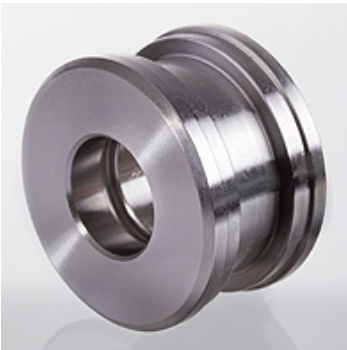

**Note**  
Suitable packing sets can be supplied on request.

| Item                |              |             |             |           |            |                |
|---------------------|--------------|-------------|-------------|-----------|------------|----------------|
| Identification      | Ø AL<br>(mm) | Ø D<br>(mm) | Ø S<br>(mm) | L<br>(mm) | L1<br>(mm) | Weight<br>(kg) |
| HK CTLM 040 015 027 | 40           | 27,0        | 15          | 27        | 5          | 0,15           |
| HK CTLM 050 021 030 | 50           | 36,0        | 21          | 30        | 5          | 0,25           |