
HK 92RD 02 BG2


Gear flow divider, size 2 92RD 2-way

HANSA-FLEX

Properties

Design	without central phase compensation valves internal leak oil discharge
Rotational speed range	1200 - 2500 U/min
Pressure difference	max. 30 bar (between the sections)
Recommended speed	1800 - 2000 rpm

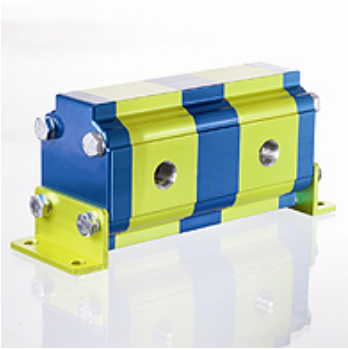



Note

Before commissioning the system, the first running-in of the gear flow divider should be under no load.

Description

This flow divider is used to supply four independent hydraulic circuits with just one pump
Division error approx. 3%
This flow divider is used to supply two independent hydraulic circuits with just one pump
Configuration of gear flow dividers: qi = Q/z * 1000/n
qi = displacement/section [cm3]; Q = total intake volumetric flow [l/min]; z = no. of sections; n = rotating speed [rpm]

Item

Identification	Intake volume per section (cc)	p1 max. (bar)	p2 max. (bar)	Flow per element min. (L/min)	Flow per element max. (L/min)	Flow per element (L/min)	A (mm)	Li (mm)	Weight (kg)
HK 92RD 02 41	4,00	210	260	4,80	10,00	7,60	47	218	4,8
HK 92RD 02 43	6,00	210	260	7,20	15,00	10,80	50	224	5,0
HK 92RD 02 45	9,00	210	260	10,80	22,50	15,10	54	232	5,3
HK 92RD 02 47	11,00	210	260	13,20	27,50	19,40	58	240	5,5
HK 92RD 02 49	14,00	200	230	16,80	35,00	25,90	64	252	5,7

p1 = max. working pressure – p2 = max. peak pressure

Despite careful checking, we cannot guarantee the accuracy of all information included on this site, and we accept no liability.