


# HK V1 866

V1866 non-return valve



| Properties         |   |
|--------------------|---|
| Design             | Cone locking<br>pilot-controlled - double-acting            |
| Material           | Housing: Galvanised steel<br>Inside parts of hardened steel |
| Operating pressure | max. 350 bar  |
| Connection         | A1 and B1 with M18 x 1.5                                    |

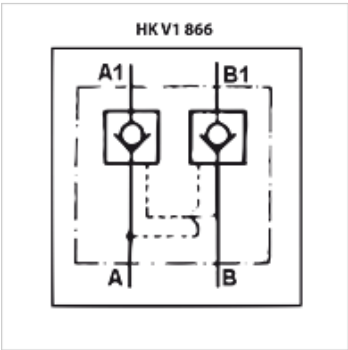

| Item           |                 |                           |                     |                   |           |                |
|----------------|-----------------|---------------------------|---------------------|-------------------|-----------|----------------|
| Identification | p max.<br>(bar) | Opening pressure<br>(bar) | Level control ratio | Q max.<br>(L/min) | H<br>(mm) | Weight<br>(kg) |
| HK V1 866 0600 | 350             | 4,0                       | 1:4.5               | 20                | 40        | 0,54           |