


HK V1 866

V1866 non-return valve

Properties

| | |
|---------------------------|---|
| Design | Cone locking pilot-controlled - double-acting |
| Material | Housing: Galvanised steel Inside parts of hardened steel |
| Operating pressure | max. 350 bar |
| Connection | A1 and B1 with M18 x 1.5 |

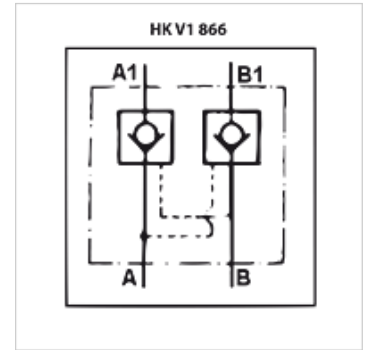

Item

| Identification | p max. (bar) | Opening pressure (bar) | Level control ratio | Q max. (L/min) | H (mm) | Weight (kg) |
|----------------|-----------------|---------------------------|---------------------|-------------------|-----------|----------------|
| HK V1 866 0600 | 350 | 4,0 | 1:4.5 | 20 | 40 | 0,54 |