


# HK V1 866

V1866 non-return valve

## Properties

<b>Design</b>	Cone locking pilot-controlled - double-acting
<b>Material</b>	Housing: Galvanised steel Inside parts of hardened steel
<b>Operating pressure</b>	max. 350 bar
<b>Connection</b>	A1 and B1 with M18 x 1.5

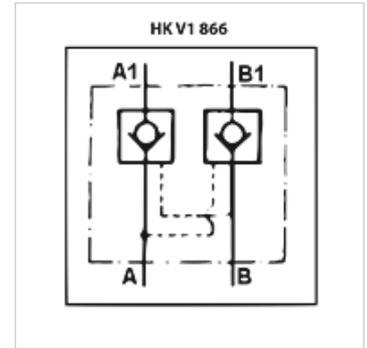

## Item

Identification	p max. (bar)	Opening pressure (bar)	Level control ratio	Q max. (L/min)	H (mm)	Weight (kg)
HK V1 866 0600	350	4,0	1:4.5	20	40	0,54