


HK REM 24

Pressure relief valve with SAE connection and relief valve

HANSA FLEX

Properties

| | |
|---------------------------|---|
| Design | SAE flange connector (e.g. for direct fitting to pumps) with magnetic relief valve 24 V; relief with magnet at zero current |
| Scope of supply | incl. SAE flanges and M10 screws |
| Operating pressure | max. 350 bar |

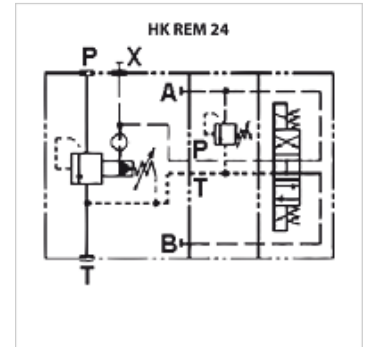

Note

These valves must be set according to the application.

Description

Pilot-controlled pressure relief valve with damping plunger
2 pressure adjustment ranges (same min / max values)
Max. volumetric flow 600 l/min
For mineral- based hydraulic oil or synthetic fluids with comparable properties

| Item | | | | | |
|------------------------|-------------------|-----------------------------------|-----------------------------------|------------------------------|-------------|
| Identification | Connection | Pressure setting range min. (bar) | Pressure setting range max. (bar) | Volumetric flow max. (L/min) | Weight (kg) |
| HK REM 3 20 350 350 24 | SAE flange 3/4" | 8 | 350 | 200,0 | 9,2 |
| HK REM 4 20 210 210 24 | SAE flange 1" | 7 | 210 | 400,0 | 9,2 |
| HK REM 5 20 210 210 24 | SAE flange 1.1/4" | 7 | 210 | 600,0 | 9,2 |

Accessories

HK SP DIN 43650 Electrical plug for solenoid coil DIN 43650 / ISO 4400